



Yamaha TT-R 110

FLS-95040

Written By: Patrick Tellier



Step 1 — Yamaha TT-R 110




- Put the bike on a stand and remove the stock rear shock.

Step 2



- Loosen up the front exhaust bolt.
- Install the 4 mm spacer on the rear bolt exhaust
- Tighten up all the exhaust bolts.

Step 3

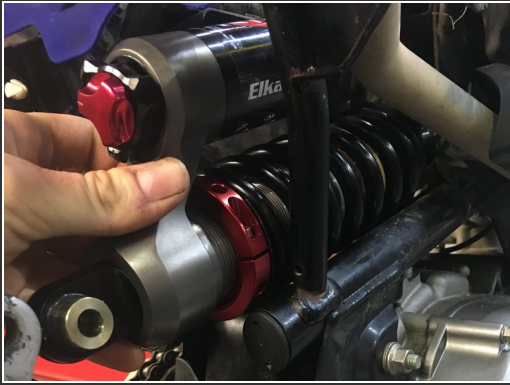

- Install the elka shock with the eyelet at the top and the head at the bottom.
- Rebound adjuster must be facing upwards.
- Installation is complete.